



CATALOG 2022

UNION FLOOR

ZHANGJIAGANG REFINE UNION NEW MATERIALS CO.,LTD

MULTI-FUNCTIONAL COMPOSITE COMMERCIAL FLOOR ROLL

MULTI-FUNCTIONAL COMPOSITE COMMERCIAL FLOOR ROLL INSTALLATION / MAINTENANCE

Installation should be performed in accordance with local standards , Before laying the floor , make sure that the ground is smooth , hard , clean and dry . If necessary , an effective moisture-proof film should be laid on the ground . Before installing the bottom plate , the floor material should be opened 24 hours in advance and spread at a room temperature of 18-24 °C to adapt to the environment. Regular maintenance is carried out to ensure that the appearance is clean and durable . Regularly clean and use a neutral detergent to wet the floor to maintain the floor or use a fine spray pad cleaning machine to clean a large area of the floor.



APPLICATION:

office , inn , home , shops , restaurants , schools , gym , stadium , library , nursing homes , hospitals , Early education , kindergartens , welfare center , factory , etc .



Environment Friendly



Flame Retardant



Easy to Clean




Anti-slip wear-resistant



Moisture-proof



Sound Absorbing

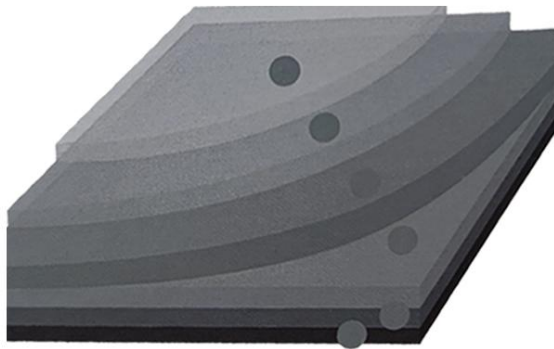

- ① UV treatment layer
- ② High strength wear-resistant layer
- ③ Colorful printing layer
- ④ Fiber glass layer
- ⑤ Reinforcing layer
- ⑥ Foamed base

| TECHNICAL DATA | TEST METHOD | TEST RESULT |
|-------------------------------------|---------------|-------------------|
| Total thickness | EN428 | 2.0/2.5/3.0/3.5MM |
| Roll width | EN426 | 200CM |
| Roll length | EN426 | 10-20M |
| weight | EN430 | 2000G/M |
| Wear layer thickness | EN429 | 0.4MM |
| Antibacterial and mildew resistance | | qualified |
| Flame retardant | GB8624-2006 | BF1 |
| Sound-absorbing | EN IS0707-2 | 19 DB |
| Resistance | EN1081 | $>10^{9-10}$ |
| Chemical resistance | EN423 | qualified |
| Dimensional stability | EN424 | 0.13% |
| Non-slip | BGR181 | R9 GROUP |
| Fading | ISO 105-B02 | \cong 6RATING |
| Castor chair | EN425 | 8000转 |
| Pressure resistance | EN433 | 0.16MM |
| Poridan iodine | ASTM F925 | excellent |
| National Building Materials Testing | GB 18586-2001 | qualified |

2.0T COMMERCIAL FLOORING
 DIMENSION : 20M (L) * 2.0M (W)

PURE COLOUR SERIES




SC-03



SC-14




SC-05

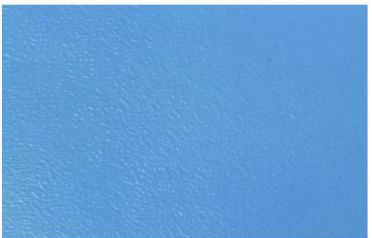


SC-04




SC-01

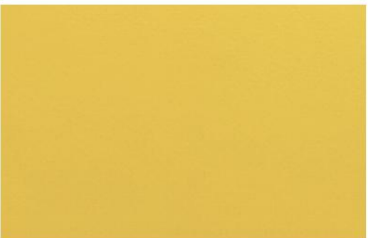


SC-02

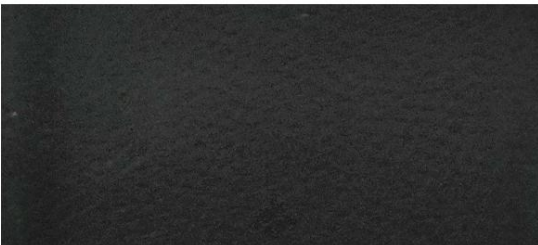

SC-13

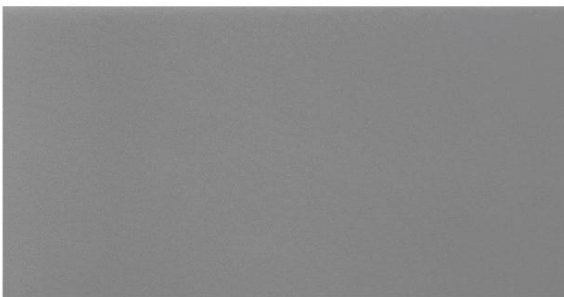


SC-12

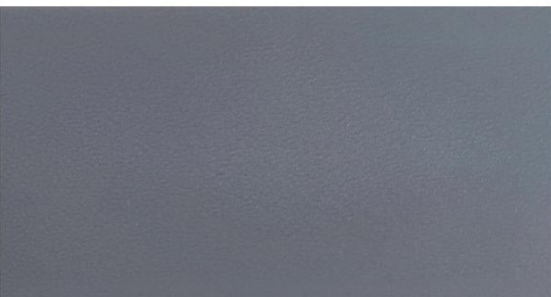

SC-07



SC-08

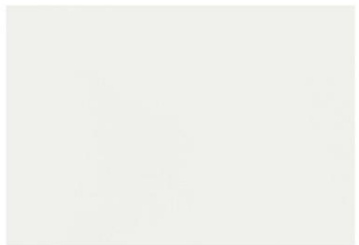

SC-09



SC-11




SC-10


SHINY SERIES




SY-1711

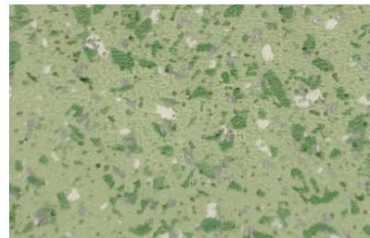

SY-1709



SY-1710

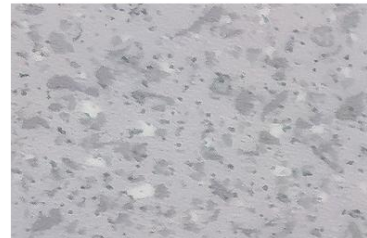

SY-1701




SY-1706




SY-1708




SY-1705

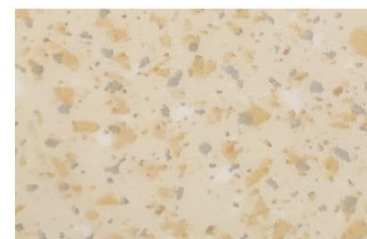


SY-1702

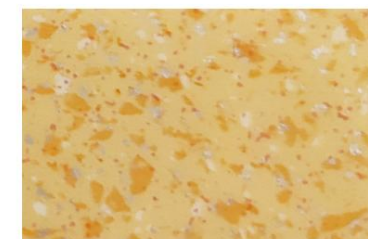

SY-1703

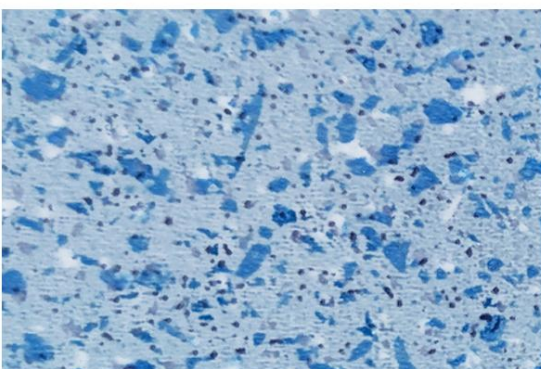


SY-1707

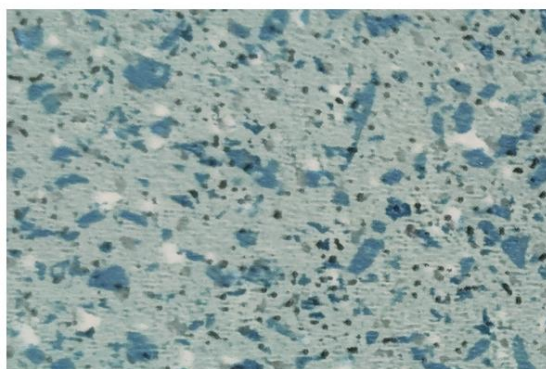


SY-1704




SPARKLE SERIES

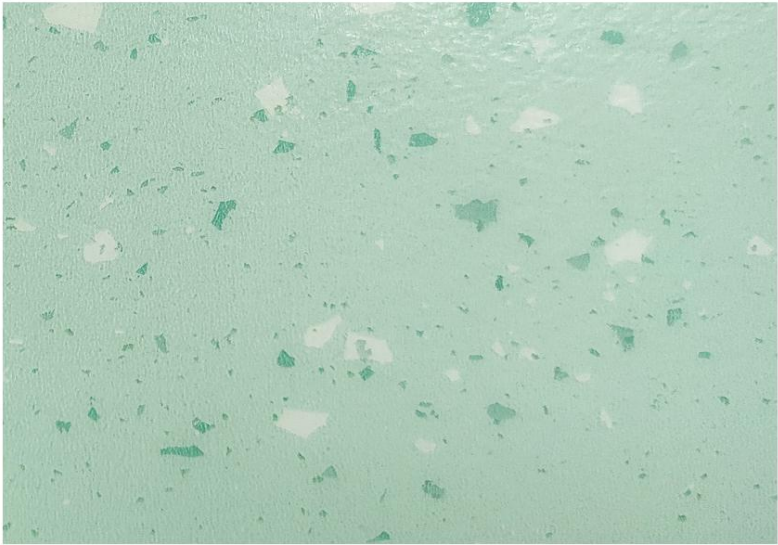


YSL-30017

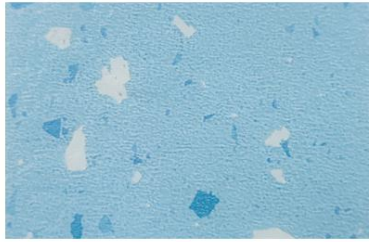

YSL-30013

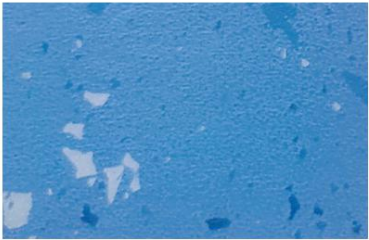

YSL-30014

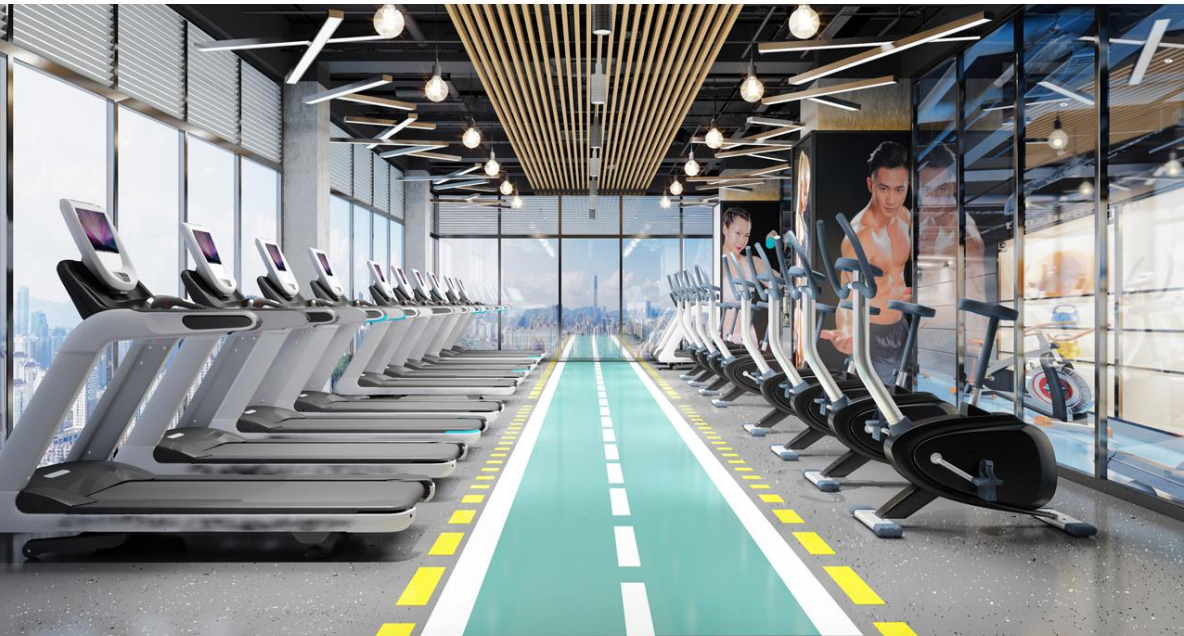


YSL-30011




YSL-30018




YSL-30019

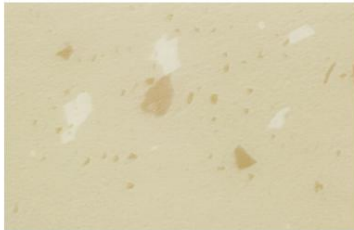

YSL-30016

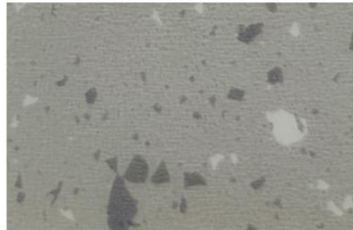

YSL-30012

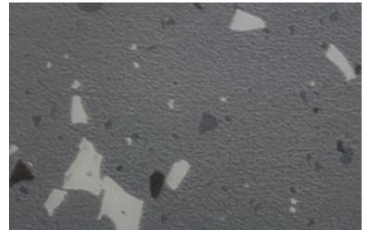

YSL-30015



ZHANGJIAGANG REFINE UNION NEW MATERIALS CO.,LTD

Add: Economic And Technical Developing Zone, Zhangjiagang City, Jiangsu Province, China

Tel: 0086-512-55395167, 56313127, 55395108

Mobile: 0086-13773228820, 0086-13962466356

Fax: 0086-512-56313167

Website: www.rfunion.com

E-mail: steven@rfunion.com



Refine Union