

UNION FLOOR

ZHANGJIAGANG REFINE UNION NEW MATERIALS CO.,LTD

woven vinyl cushion mat



1.Thickness

12mm, 15mm, 20mm

2.Weight


1.2800g±100g/m² for 12mm thickness

2.3400g±100g/m² for 15mm thickness

3.3700g±100g/m² for 20mm thickness



3.Backing: PVC foaming

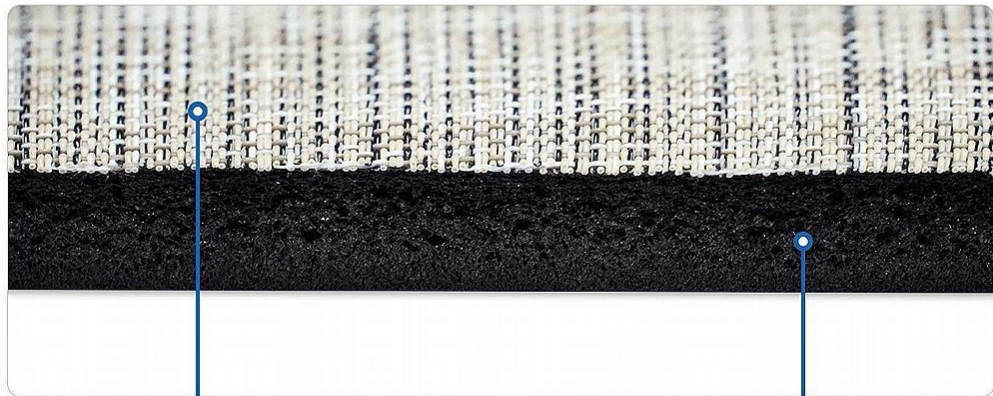


Woven surface

foaming layer


4.Size

(Maximum size: 140cm in length and 80cm in width)


12mm thickness

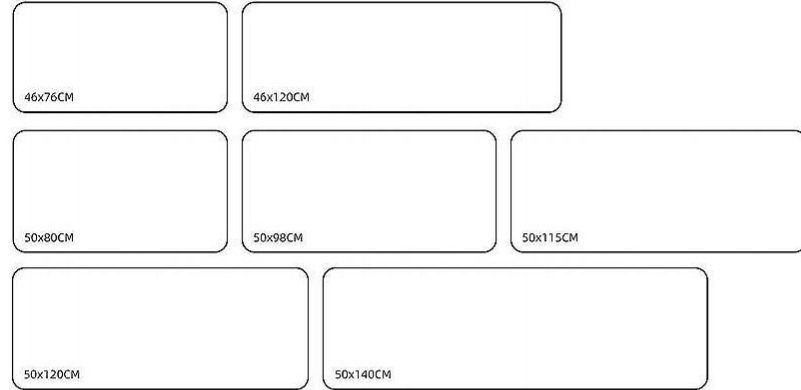


15mm thickness

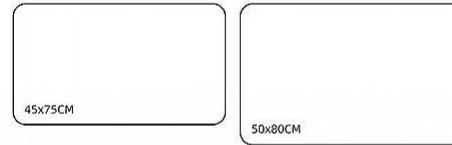

20mm thickness

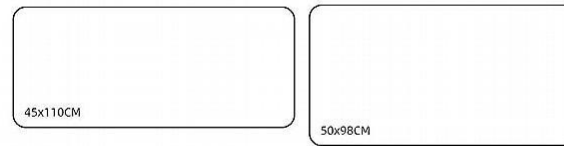

4.Angle

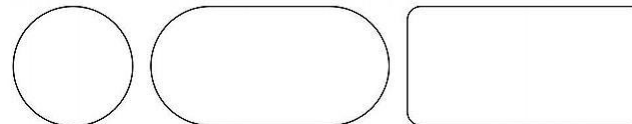

6.Locked edge




Only: Locked edge

8.Backing: PVC foaming



7.Performance

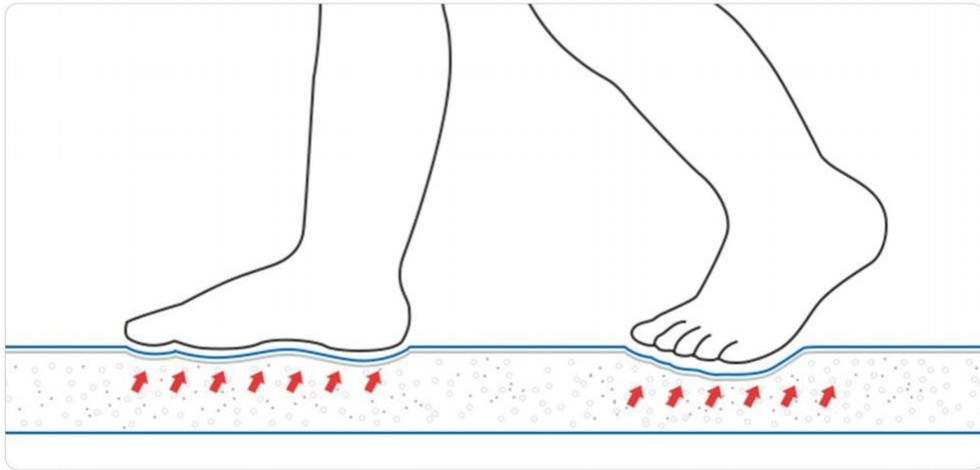

Relieve the leg pressure of standing for a long time.



New type Anti fatigue mat .



ECO-8002H




ECO-8005H



ECO-8014H-8



ECO-8015H

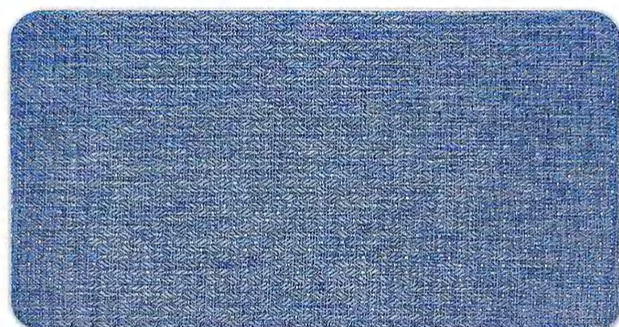


ECO-8018H



ECO-8019H



ECO-8015H

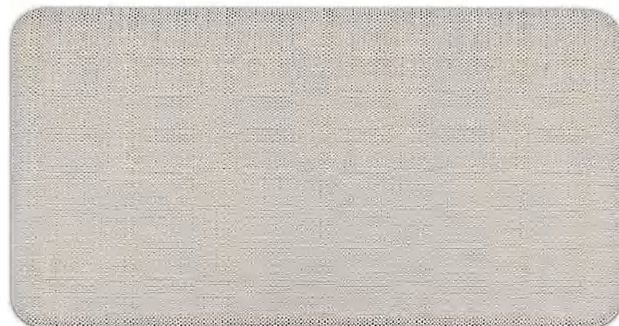

ECO-8018H



ECO-8019H



ECO-8075H-1



ECO-8077H-1



ECO-8080H



ECO-21002



ECO-21005



ECO-21006



ECO-21012




ECO-21018



ECO-21031


New type Anti fatigue mat .

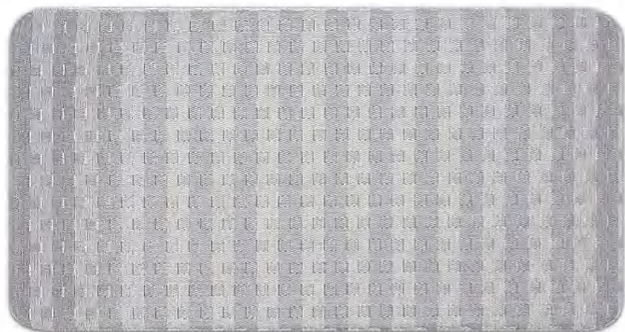

ECO-21032-1



ECO-21060-1

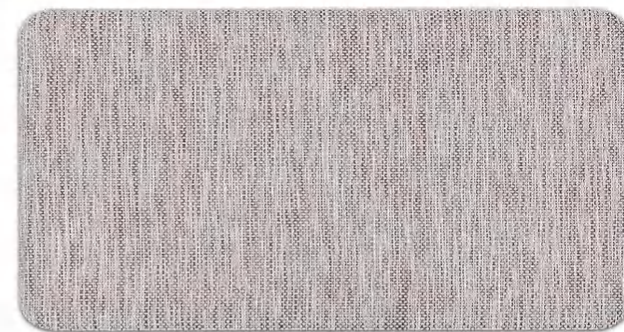

ECO-44007



ECO-44039



ECO-51013BP




ECO-52036BP



ECO-52002BP



ECO-52019

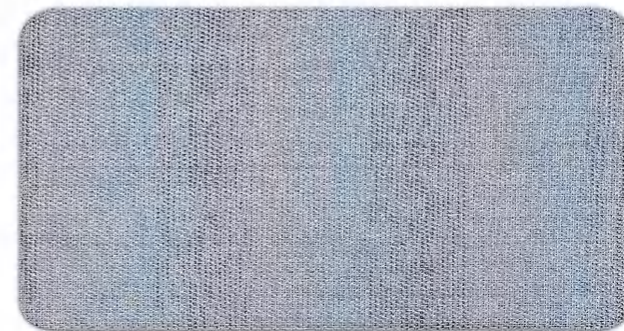

ECO-52032



Use scenario : restroom

Our Anti fatigue mat can play a waterproof and anti-skid effect in the bathroom , ensuring safety and comfort .



UNIOM FLOOR

Use scenario : kitchen

Our Anti fatigue mat is suitable for the kitchen , can reduce the fatigue feeling of standing in the kitchen for a long time , at the same time , it also has a good effect of removing stains and anti-skid



Applicable scene.


UNIOM FLOOR

Applicable scene .




UNIOM FLOOR

other scene .

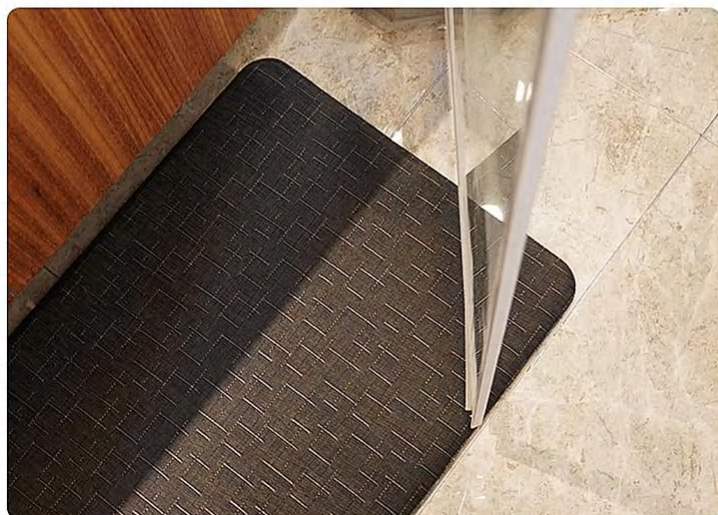

Items	Method	Rugs	Anti fatigue mat		
Weight	IS08543	1. 5-3kgs/m ²	2800g±100g/m ² 3400g±100g/m ² 3700g±100g/m ²		
Thickness	ISO 1765	1. 5-4mm	12mm/15mm/20mm		
length	EN 426		Max.Length 140cm		
width	EN 426	2m	Max.Width 80cm		
Dimension stability	ISO 2551	<0. 25%	<0. 25%		
CurvatureCaster	EN 434	<2mm	<2mm		
Chair	EN 985	Continous use	Continous use		
Body voltage	ISO 1815	≅2. 0KV	≅2. 0KV		
Thermal resistance	ISO 8302	Suitable for underfloor heating	Suitable for underfloor heating		
Colour fastness to light	ISO 108-B02	>6	>6		
Anti-slip property	EN 13893	>0. 3	>0. 3		
Reaction to fire	EN 13501-1	Bfi-s1	Bfi-s1		
Smoke density	ASTM E662	<450	<450		
REACH test	(REACH) 1907/2006	NO. 200907002SHF-006	/		
Phthalate content test	COSC-CH-C1001-09. 3	NO. 191202004SHF-001	Tested compound	Result(% w / w)	Limit(% w / w)(Max)
			Dibutyl phthalate (DBP)	ND	0. 1
			Diethyl hexyl phthalate (DEHP)	ND	0. 1
			Benzyl butyl phthalate (BBP)	ND	0. 1

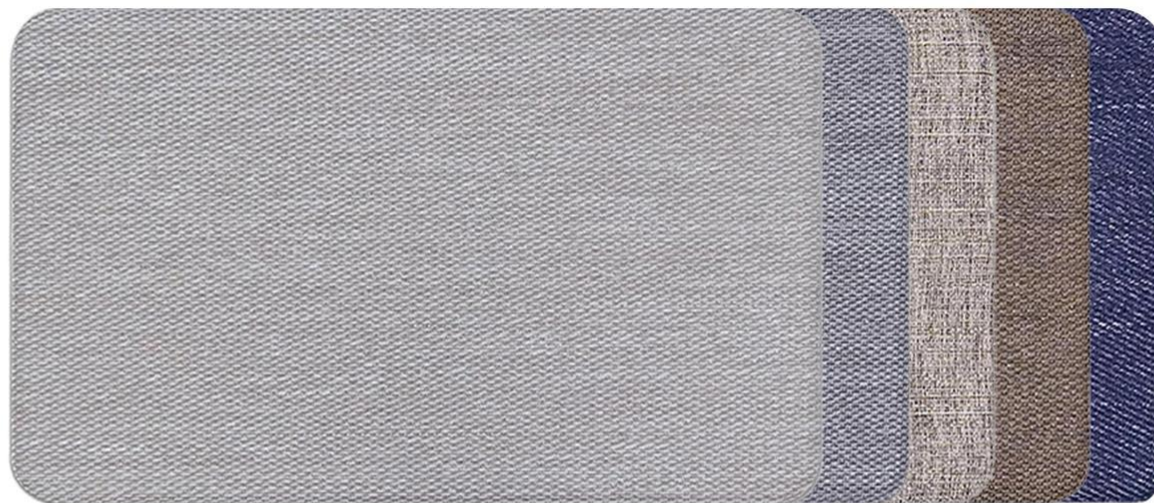

ZHANGJIAGANG REFINE UNION NEW MATERIALS CO.,LTD

Add: Economic And Technical Developing Zone, Zhangjiagang City, Jiangsu Province, China

Tel: 0086-512-55395167, 56313127, 55395108

Mobile: 0086-13773228820, 0086-13962466356

Fax: 0086-512-56313167

Website: www.rfunion.com

E-mail: steven@rfunion.com



Refine Union